

## Short description:

- Fit for 4-wire load cells.
- Easy linstallation.
- Stainless Steel housing.

## Available models:



Model	Amount of connections	Full article description	
AE-JBM-ss	4	AE-JB-ss-4-304C	
	6	AE-JB-ss-6-304C	
	8	AE-JB-ss-8-304C	
	10	AE-JB-ss-10-304C	

## Detailed specifications AE-JB-S304:

Load cell output resistance range	$\Omega$	340 to 1100
Load cell input resistance range	$\Omega$	340 to 1100
Excitation recommended voltage	V(AC&DC)	5 tot 15
Excitation, maximum	V(AC&DC)	20
Load cell sensitivity range	mV/V	0,6 – 3
Cable $\varnothing$	mm	5 to 6,2
Correction method		Excitation trim
Trimming range	$\Omega$	20 ( $\pm 10$ )
Temperature range, operating	$^{\circ}\text{C}$	-40...+85
Ingress protection		IP65
Housing connected to shield		No
External grounding		No

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Dimensions in mm:

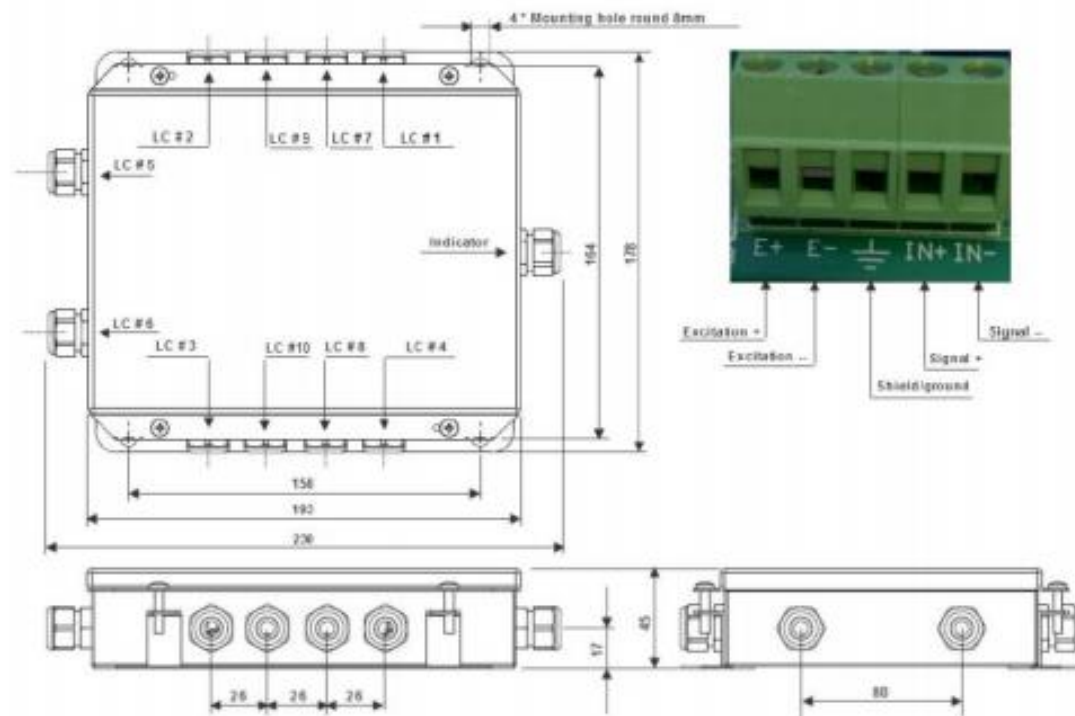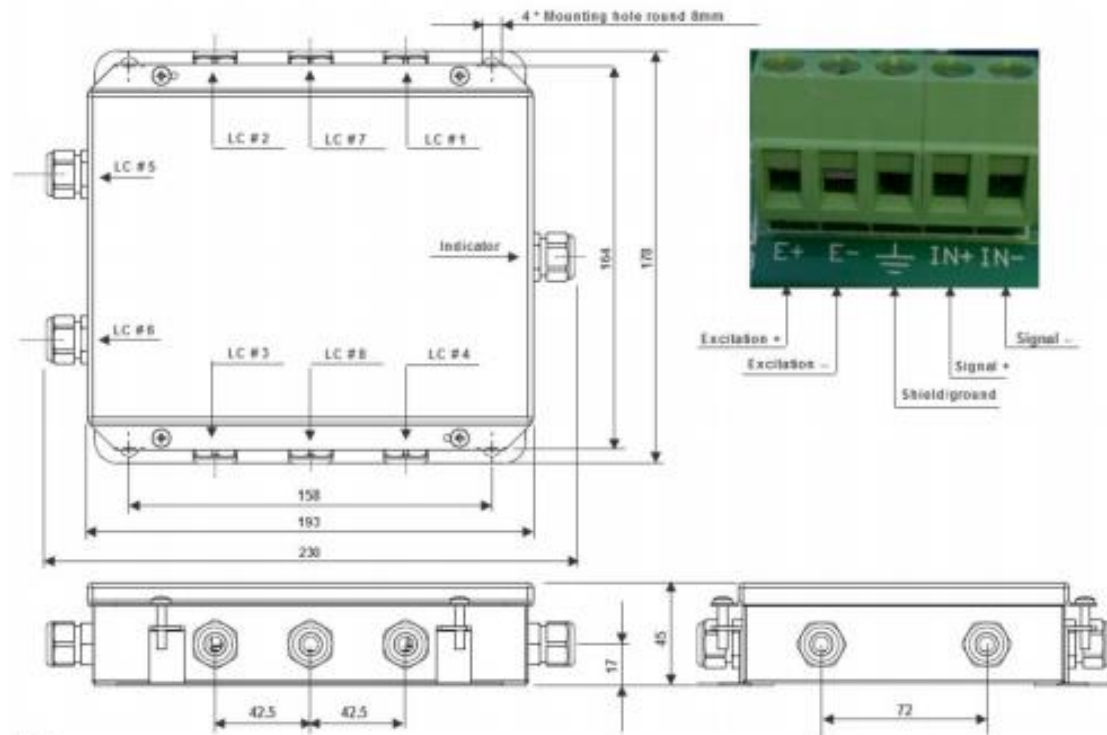

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.